



Flow Atoll Blue 3"x12"

Flow

Inspired by the movement of water, our Flow collection transforms any room with its fresh color palette and unique texture, creating a space that stimulates the senses. Far from the traditional handmade tiles, this collection creates the ideal oasis for anyone that loves feeling youthful and enjoys modern adaptations of classics.



Flow Velvet Pink 3"x12"

Ceramic Wall & Gres Stonewear


3"x12" 8"x9"

Flow

Ceramic Wall

Wall Tiles

7.3 mm |
 B |
 VS |
 25% Recycled (Ceramic) |
 3"x12" 7.7x30.5 cm

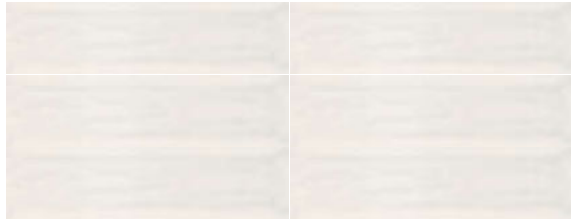


White



3"x12"
FLOWH17-312




3"x12" Bullnose
FLOWH7-S4312

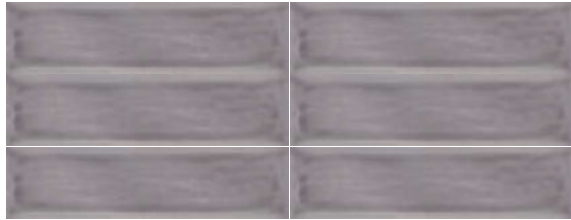

Lavender




3"x12"
FLOLV07-312

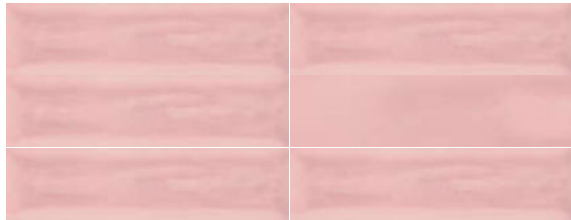

Velvet Pink



3"x12"
FLOVP05-312

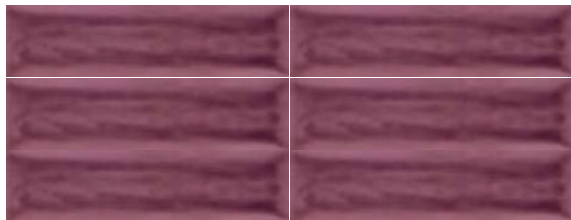

Burgundy



3"x12"
FLOBG04-312




Tender Gray



3"x12"
FLOTG10-312



3"x12" Bullnose
FLOTG10-S4312

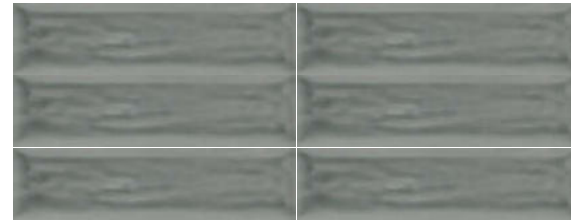


Dark Gray



3"x12"
FLOGD08-312




3"x12" Bullnose
FLOGD08-S4312

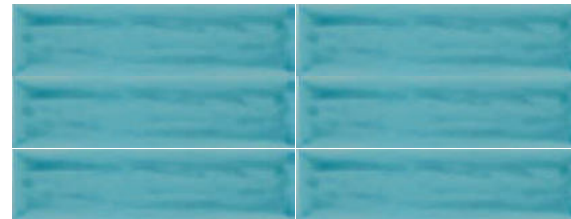

Atoll Blue




3"x12"
FLOAB03-312

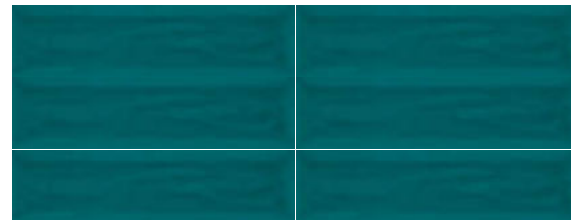

Peacock Green



3"x12"
FLOPG02-312

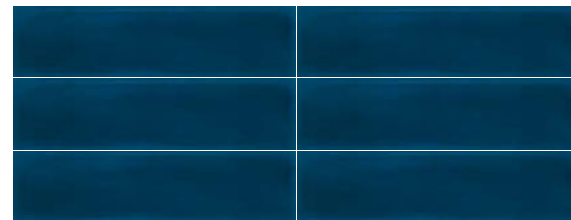

Cosmic Sapphire



3"x12"
FLOCB09-312

Flow

Ceramic Wall

Wall Tiles

3"x12"
 7.7x30.5 cm



White



3"x12" Picket
FLOWH17-312P



Tender Gray




3"x12" Picket
FLOTG10-312P



Dark Gray




3"x12" Picket
FLOGD08-312P

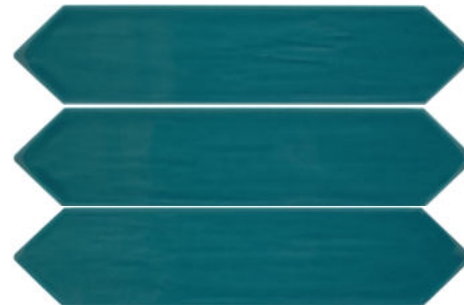

Peacock Green



3"x12" Picket
FLOPG02-312P

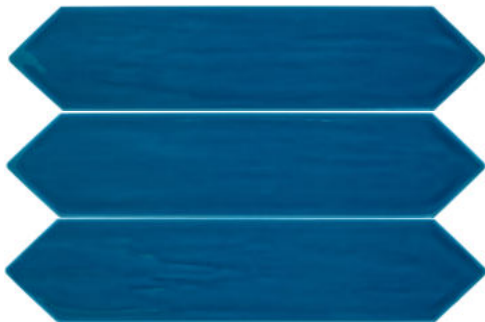

Cosmic Sapphire



3"x12" Picket
FLOCB09-312P

Installation Recommendation:

The recommended overlap for the 3"x12", 4"x16" and 6"x18" Ceramic Wall Tile formats is 33%, which is most effective to avoid lippage




Flow Picket Dark Gray 3"x12"

Flow

Gres Stonewear

Floor Tiles


8.2 | | **8"x9"**
20"x23" cm

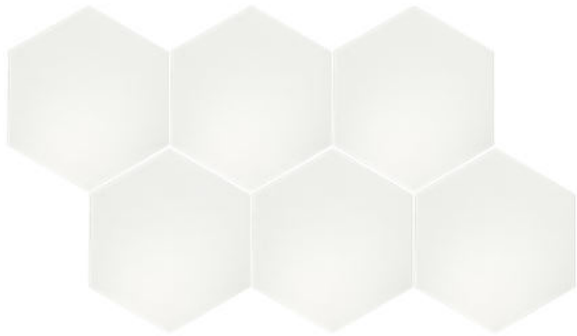


White




8"x9" Hexagon
FLOWH7-89H

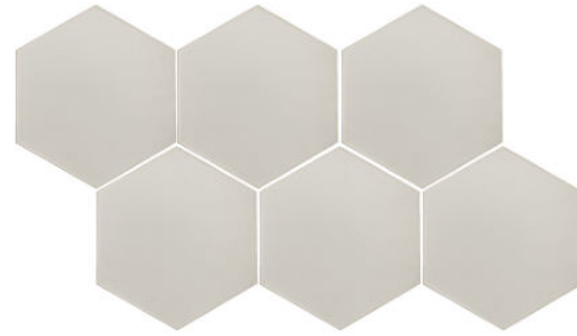

Tender Gray




8"x9" Hexagon
FLOTG10-89H

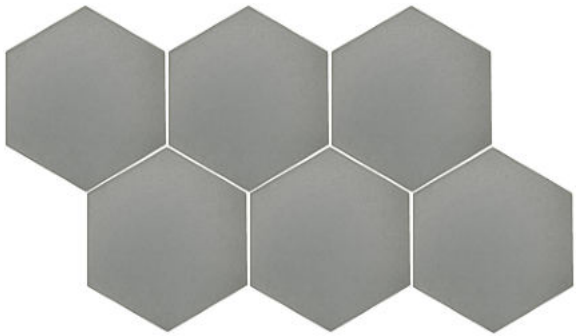

Dark Gray




8"x9" Hexagon
FLOGG08-89H

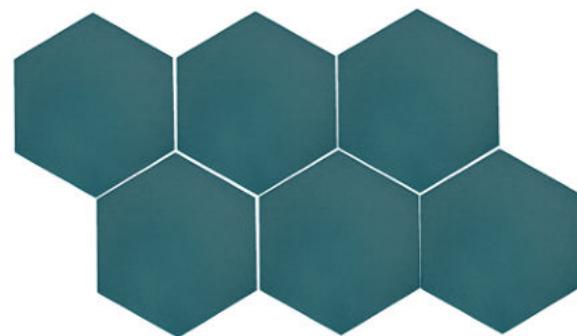

Peacock Green



8"x9" Hexagon
FLOPG02-89H

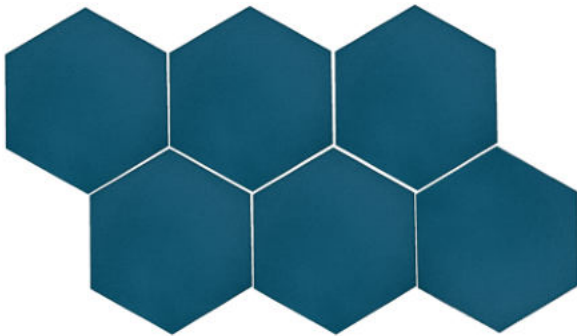

Cosmic Sapphire



8"x9" Hexagon
FLOCB09-89H



Flow Hexagon Dark Gray 8"x9"

Technical Specifications - 3"x12" & Picket

Characteristics	Standard	Declared ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or exceeds
Scratch Hardness	MOH's Scale	N/A
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V3
Warpage	C485	Pass
Wedging	C502	Pass

Technical Specifications - Hexagon

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<3%
Break Strength	C648	Min. 250
Scratch Hardness	MOH's Scale	5
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	3
Deep Abrasion - Unglazed Tiles	C1243	-
PEI Glazed Tiles	C1027	4
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA "V"	V2
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton
3"x12"	12.64	50
Picket	11.79	50
Bullnose	12.59	50
Hexagon	10.36	28